

**Head Office**

2nd Floor Helvetia House  
Greenvale Road  
Wilbart, Germiston  
PO Box 4455, Edenvale 1610  
Tel: 010 593 2717  
Fax: 011 450 3125  
www.cpw.co.za

**Wynberg**

766 5th Street,  
Wynberg, Johannesburg  
Tel: 010 593 2717

**Alrode**

5 Vereeniging Road,  
Alrode, Johannesburg  
Tel: 010 593 2717

**Cape Town**

Unit 14, 44 Paarden Eiland Road  
Paarden Eiland, Cape Town  
Tel: 010 593 2717

**Montana**

371 Calliandra Street,  
Montana, Pretoria  
Tel: 010 593 2717

**Centurion**

130 Edward Street,  
Centurion, Pretoria  
Tel: 010 593 2717

**Strijdom Park**


130 Edward Street,  
Centurion, Pretoria  
Tel: 010 593 2717

**Bloemfontein**

2 Enterprise Street  
Hamilton, Bloemfontein  
Tel: 010 593 2717

**CPW METAL CEILING TILES DATA SHEET**

CPW – Ceiling and Partition Warehouse is a company that prides itself on superior quality products and customer service. Our metal ceiling tile range is no exception, made from superior quality aluminium resulting in light weight, easy to install tiles.

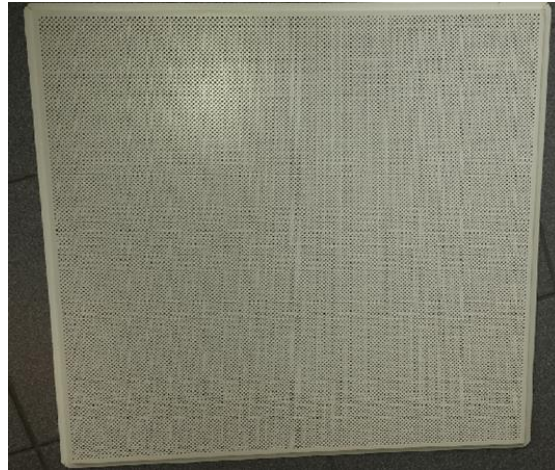

**Advantages:**

- Fire Resistant
- Damp Resistant
- Sound Absorbing
- Contamination Resistant
- Washable
- Scratch Resistant

**Specification:**

Dimensions: 600X600mm (1200X600mm available on request for “clip in tiles” only)  
Thickness: 0.7mm  
Facing: White, Perforated  
Backing: Black tissue backing  
Smoke Density Grade: 8  
Average Smoke Temperature: 111°C  
Sound Absorption Coefficient: ISO 354  
Certificate Standard: BS 476, Part 6 1989  
BS 476, Part 7 1971  
ASTEM E84-04  
Edges: Beveled / Square  
Perforation Type: 1.8mm Diameter holes, 22% open area

**Composition:**

Aluminium tile, powder coated surface and surface preservative treatment.

**Hazards:**

These products are defined as non-hazardous.

**Supporting Structure:**

- Standard 24mm face ceiling grid consisting of main tees and cross tees for lay in metal ceiling panels.
- Concealed grid system consisting of spring tees, main channels, brackets and clips, etc. for clip in panels.

**Handling and storage:**

Care should be taken to ensure that the CPW metal ceiling tiles are not dropped or subjected to rough handling. Metal ceiling tiles should be stored in an enclosed, dry area. The stacks must be packed on suitable timber supports, maximum 400mm apart and off the ground.

A level, clean and dry storage area must be made available.

Avoid soiling or damaging during handling of the metal tiles. Clean with a mild detergent if necessary.